

Pyrolox® effectively reduces iron, manganese and hydrogen sulfide from problem water.

# Pyrolox®



Pyrolox® is a granular water filtration media used for the removal of hydrogen sulfide, iron and manganese. A naturally mined ore, Pyrolox has been used in water treatment for more than 75 years.

Through a natural chemical reaction, Pyrolox has the ability to help produce clean, high-quality water. Pyrolox filter media works by oxidizing iron, manganese and hydrogen sulfide in problem water. Trapped particulate is then removed from the media bed during the backwash cycle.

**To maintain and further augment the long-term performance and removal capacity of the media, an oxidant feed of some type is recommended.** This will maintain the media and enhance removal capacity. Chlorine injection (options include chlorine, sodium hypochlorite, or calcium hypochlorite) immediately up stream of the filter feed is a simple way to meet this recommendation. Other acceptable oxidants include air injection, potassium permanganate, sodium permanganate, etc. **Hydrogen peroxide is specifically prohibited for use as an oxidant.**

It is important that Pyrolox media is backwashed properly to ensure adequate bed expansion and continued service life.

**It is recommended that Pyrolox be installed with an underbed and be backwashed daily. Individual application requirements may vary.**

## ADVANTAGES

- Effective reduction of iron, manganese and hydrogen sulfide
- Durable media with long service life


## PHYSICAL PROPERTIES

- Color: Black
- Bulk Density: 120 lbs./cubic foot
- Mesh Sizes: US 8 x 20, US 20x40, UK 18/44
- Specific Gravity: 3.8
- Packaging: 60 lb. bags, 2,000 or 2,205 lb. super sacks


## CONDITIONS FOR OPERATION

- pH: 6.5-9.0
- Bed Depth: Suggested depth 18 inches. Dependent on application and water quality.
- Backwash Flow Rate: 25-30 gpm/sq.ft.
- Freeboard: 40% of bed depth (min.)
- Underbed: Garnet #8, #8-#12. #3 Silica. Other materials are also suitable but must keep media from migrating downward and be heavy enough to remain in place during backwash.
- Service flow rate: 5 gpm/sq. ft.

### Service Flow Pressure Drop

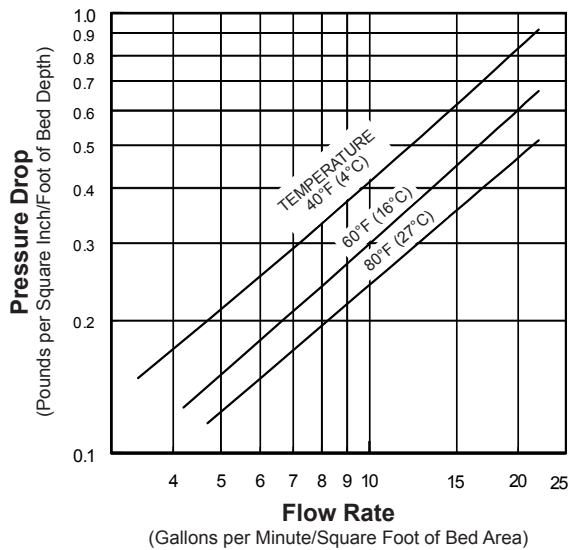

### Backwash Bed Expansion

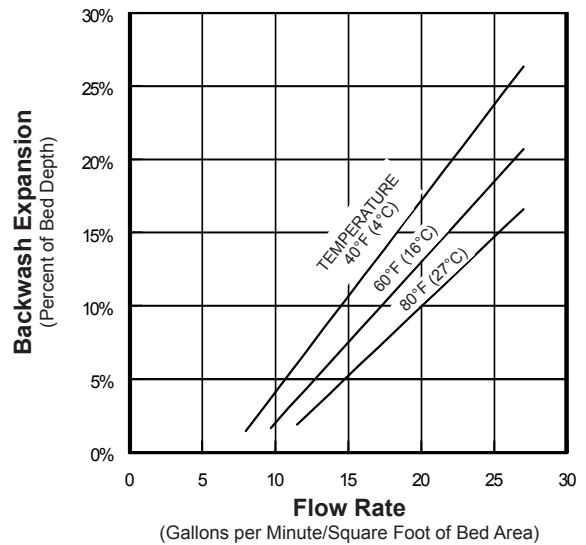

Certified to NSF/ANSI Standard 61

Pyrolox® is manufactured by Prince Minerals Inc., Quincy, IL.

### ORDER INFORMATION

Part No.	Description	Cu. Ft./Bag	Wt./Cu. Ft.*	Bags/Pallet	Weight/Pallet	Pallet Dimensions
A8005	Pyrolox®	0.5 (60 lbs.)	120 lbs.	50	3050 lbs.	42" x 42" x 43"

\*Weight per cubic foot is approximate.

Pyrolox® is a registered trademark of Prince Minerals Inc., Quincy, IL.

The information and recommendations in this publication are based on data we believe to be reliable. They are offered in good faith, but do not imply any warranty or performance guarantee, as conditions and methods of use of our products are beyond our control. As such, Clack makes no express or implied warranties of any kind with respect to this product, including but not limited to any implied warranty of merchantability or fitness for a particular purpose. We recommend that the user determine whether the products and the information given are appropriate, and the suitability and performance of our products are appropriate, by testing with its own equipment. Specifications are subject to change without notice.

The information and recommendations given in this publication should not be understood as recommending the use of our products in violation of any patent or as a license to use any patents of the Clack Corporation.

The filter medias listed in this brochure do not remove or kill bacteria. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Clack will not be liable under any circumstance for consequential or incidental damages, including but not limited to, lost profits resulting from the use of our products.



Clack Corporation

**LENNTECH**

info@lenntech.com Tel. +31-152-610-900  
www.lenntech.com Fax. +31-152-616-289